


# Crescent® Vector™ H220 Board

## Next Generation, High-Performance GNSS Module

### key features

- Extremely accurate heading with short baselines
- L1 GPS/GLONASS/BeiDou/Galileo/QZSS/IRNSS RTK capable
- Integrated L-band for Atlas® corrections
- Excellent coasting performance
- 10 cm heave accuracy with RTK
- Strong multipath mitigation and interference rejection
- New multi-axis gyro and tilt sensor for reliable coverage during short GNSS outages

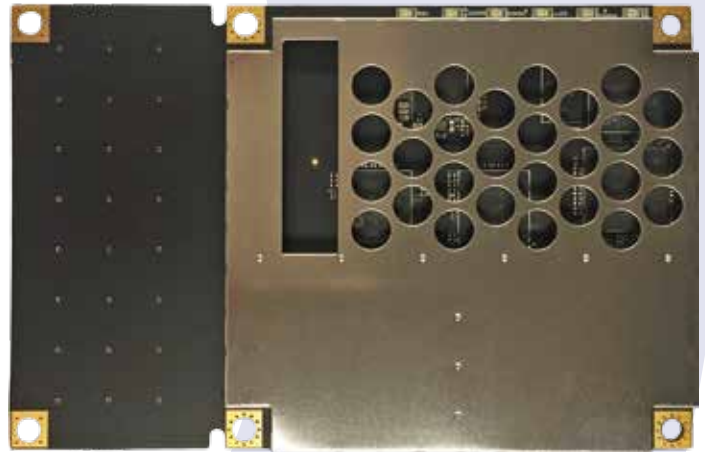

The Crescent Vector H220 GNSS OEM board is the next generation, single-frequency, high-performance GNSS heading, positioning, and attitude module available from Hemisphere GNSS.

The H220 provides integrators with an opportunity for developing sophisticated marine, navigation, and land applications in challenging, dynamic environments. The H220 uses Hemisphere's advancements in Vector technology, advanced multipath mitigation techniques, and Hemisphere's patented Multifunction Application.

H220 is capable of providing heading of 0.04° with a 5 meter antenna baseline and either RTK or SBAS positioning depending on your location requirements. With Atlas corrections, the H220 can obtain instant sub-meter accuracy worldwide while being more robust than SBAS even in SBAS regions.

Integrate the robust H220 GNSS OEM board into your applications to experience exceptional heading, positioning, and attitude performance in a compact size. Diversity and cost savings make it an ideal part of your solution for system integrators.



# Crescent Vector H220 Board

## GNSS Sensor Specifications

Receiver Type:	GNSS L1 RTK
Signals Received:	GPS, GLONASS, BeiDou, Galileo, QZSS <sup>4</sup> , IRNSS <sup>6</sup> and Atlas
Channels:	300
GNSS Sensitivity:	-142 dBm
SBAS Tracking:	2-channel, parallel tracking
Update Rate:	Standard 10 Hz, optional 20 Hz or 50 Hz (position and heading)

## Positioning Accuracy

RMS (67%):	Horizontal	Vertical
Autonomous: <sup>1</sup>	1.2 m	2.5 m
SBAS (WAAS): <sup>1</sup>	0.3 m	0.6 m
Code Differential GPS:	0.3 m	0.6 m
RTK: <sup>1,2</sup>	10 mm + 1 ppm	20 mm + 2 ppm
Atlas (L-band) Accuracy: <sup>3</sup>	30 cm	
Heading Accuracy: <sup>2</sup>	0.30° rms @ 0.5 m antenna separation 0.15° rms @ 1.0 m antenna separation 0.08° rms @ 2.0 m antenna separation 0.04° rms @ 5.0 m antenna separation	
Pitch/Roll Accuracy:	< 1° rms	
Heave Accuracy:	30 cm <sup>3</sup>	
Timing (1PPS)	Accuracy: 20 ns	
Rate of Turn:	145°/s maximum	
Cold Start:	< 40 s typical (no almanac or RTC)	
Warm Start:	< 20 s typical (almanac and RTC)	
Hof Start:	< 5 s typical (almanac, RTC and position)	
Heading Fix:	< 10 s typical (valid position)	
Maximum Speed:	1,850 kph (999 kts)	
Maximum Altitude:	18,288 m (60,000 ft)	

## Communications

Serial Ports:	4 full-duplex 3.3 V CMOS (3 main serial ports, 1 differential-only port)
USB Ports:	1 USB Host, 1 USB Device
Baud Rates:	4800 - 115200
Correction I/O	
Data I/O Protocol:	NMEA 0183, Crescent binary <sup>4</sup>
Protocol:	RTCM SC-104, RTCM v2 (DGPS), RTCM v3 (RTK), CMR (RTK), CMR+ (RTK) <sup>5</sup>

<sup>1</sup> Depends on multipath environment, number of satellites in view, and satellite geometry

<sup>2</sup> Depends on multipath environment, antenna selection, number of satellites in view, satellite geometry, baseline length (for local services), and ionospheric activity

<sup>3</sup> Based on a 40 second time constant

<sup>4</sup> Hemisphere GNSS proprietary

<sup>5</sup> IMO standard

<sup>6</sup> With future firmware upgrade and activation

Timing Output:	1PPS, CMOS, active high, rising edge sync, 10 kΩ, 10 pF load
Event Marker Input:	CMOS, active low, falling edge sync, 10 kΩ, 10 pF load

## Power

Input Voltage:	3.3 VDC +/- 5%
Power Consumption:	< 2.1 W nominal GPS (L1) and GLONASS (L1)
Current Consumption:	< 0.63 A nominal GPS (L1) and GLONASS (L1)

## Environmental

Operating Temperature:	-40°C to +85°C (-40°F to +185°F)
Storage Temperature:	-40°C to +85°C (-40°F to +185°F)
Humidity:	95% non-condensing (when in an enclosure)
Shock and Vibration:	Mechanical Shock: EP455 Section 5.14.1 Operational (when mounted in an enclosure with screw mounting holes utilized) Vibration: EP455 Section 5.15.1 Random CE (IEC 60945 Emissions and Immunity) FCC Part 15, Subpart B CISPR 22
EMC:	

## Mechanical

Dimensions:	10.9 L x 7.1 W x 0.5 H (cm) 4.3 L x 2.8 W x 0.2 H (in)
Weight:	~ 50 g (~ 1.8 oz)
Status Indications (LED):	Power, master GPS lock, secondary GPS lock, differential lock, DGPS position, and heading lock
Power/Data Connector:	34-pin male header 2 mm pitch

## Aiding Devices

Gyro:	Provides smooth and fast heading reacquisition. During loss of GNSS signals heading stability is degraded by < 1° per minute for up to 3 minutes. <sup>5</sup> Provide pitch and roll data and assist in fast startup and reacquisition of heading solution.
Tilt Sensors:	

Authorized Distributor:



Copyright Hemisphere GNSS, Inc. All rights reserved. Specifications subject to change without notice.  
Hemisphere GNSS, Hemisphere GNSS logo, Atlas, Atlas logo, Eclipse, Eclipse logo, and Vector are trademarks of Hemisphere GNSS.  
Rev. 02/18



Hemisphere GNSS, Inc.  
8515 E. Anderson Drive  
Scottsdale, AZ, USA 85255

Toll-Free: +1 (855) 203-1770  
Phone: +1 (480) 348-6380  
Fax: +1 (480) 270-5070  
Precision@HGNSS.com  
www.HGNSS.com